


Description: - Rigitone Activ'Air 8-15-20 Super

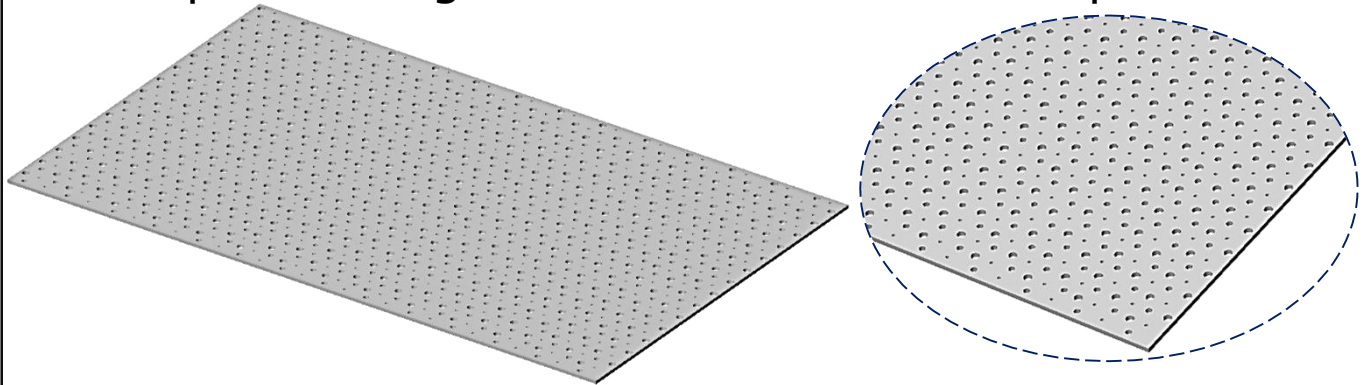

Characteristics:

Rigitone Activ'Air 8-15-20 Super comprises a 12.5mm gypsum core, with an irregular, scattered round perforation of 8,15 & 20mm diameter. It is a specially formulated Gypsum board with Activ'Air technology.

Physical Properties:

- Board Dimensions : (1200x1960) mm
- Board Thickness : 12.5mm
- Board Weight : Approx. 10 Kg/m²
- Perforation Size : 8,15 & 20mm diameter
- Perforation Spacing : Scattered
- Perforation Area : 10.0%
- Edge type : All 4 Square Edges
- Colour : Unpainted paper liner (can be painted with an emulsion paint after installation)

NRC:


Sr. No.	System (Test Combination)	NRC
1	Rigitone Activ'Air 8-15-20 Super board +50mm air Gap	0.60
2	Rigitone Activ'Air 8-15-20 Super board +200mm air Gap	0.60

ORIGINAL

1. Rigitone Activ'Air 8-15-20 Super board +50mm air Gap

Freq. (Hz)	125	250	500	1000	2000	4000
ABS Coeff.	0.15	0.40	0.70	0.75	0.45	0.40


NRC = 0.60

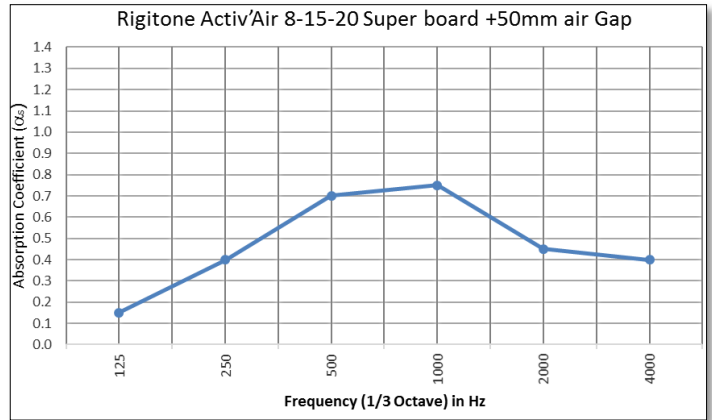

2. Rigitone Activ'Air 8-15-20 Super board +200mm air Gap

Freq. (Hz)	125	250	500	1000	2000	4000
ABS Coeff.	0.35	0.75	0.75	0.55	0.40	0.30

NRC = 0.60

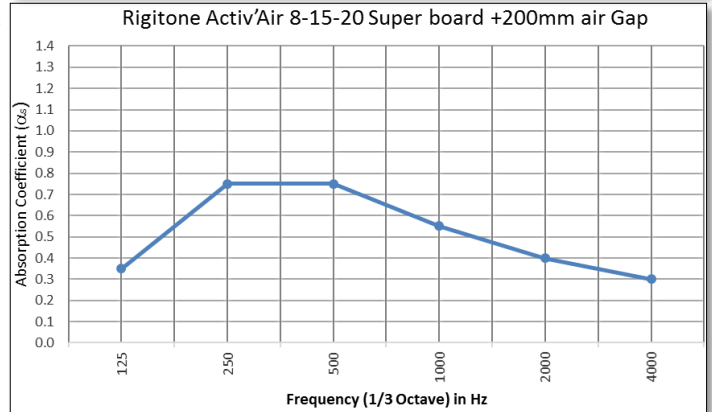

ORIGINAL