


Description: - Celotex Fine Fissured

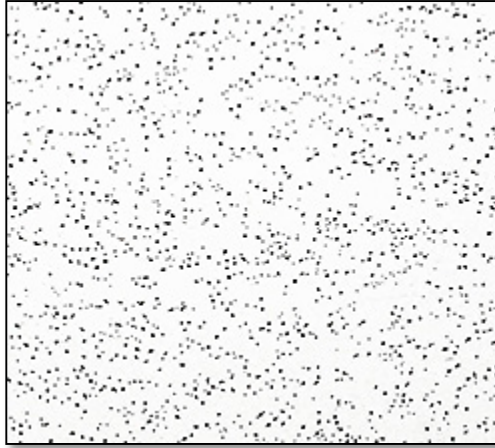

Characteristics:

Celotex Fine Fissured tiles are made from mineral fibres and are a popular choice for office spaces, combining smart aesthetics and good acoustic. It is suitable for use in interiors in temperatures up to 40 deg. C and Relative Humidity up to 95%.

Physical Properties:

Thickness	: (15±0.5) mm
Width	: (595±0.5) mm
Length	: (595±0.5) mm
Bulk Density	: (350±30) Kg/M ³
Noise Reduction Coefficient (NRC)	: ≥0.55
Ceiling Attenuation Class (CAC)	: 35 dB
Edge types	: Square, Reveal and Narrow Reveal.
Light Reflectance	: ≥0.84

ORIGINAL